


4.6.6.7 Height above surrounding ground

- (a) 75mm above ground level.
- (b) In a path finished at a level to prevent ingress of water.


4.6.6.8 Height in flood-affected areas

- (a) Finished 150 mm above flood level
- (b) Sealed with a water tight removable lid, with a vent of the same size above flood level

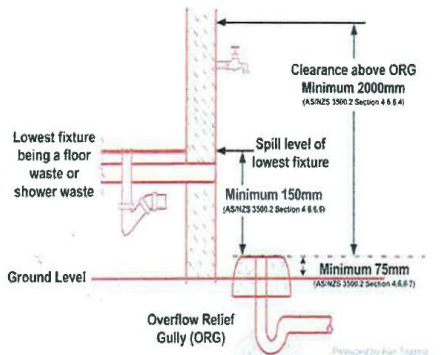

AS/NZS 3500.2:2003 - Overflow Relief Gully (ORG) requirements

Or

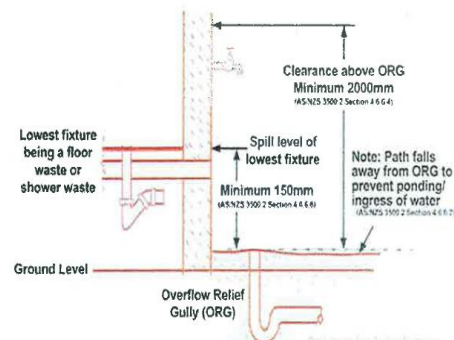

AS/NZS 3500.2:2003 - Overflow Relief Gully (ORG) requirements